


# High Speed Dome



## Features

- ★ Indoor endless high speed dome
- ★ 0.01 Lux
- ★ Aluminum body and ploy carbonate dome cover
- ★ 256 preset positions
- ★ Indoor Application
- ★ 50m IR Distance

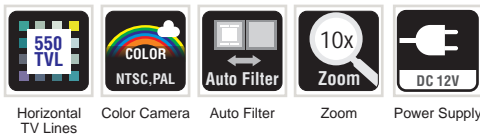

## Specification

Model	SSD-10DIRIN
Image sensor	1/4" CCD
Signal model	PAL/NTSC
Horizontal resolution	550 TVL
Effective pixel	752(Horizontal)x 582(Vertical)
Minimum illumination	Color to B/W, Color: 0.01Lux, B/W: 0.001Lux
S/N radio	50dB(Enhanced)
Backlight compensation	On/Off
White balance	Auto
Electronic shutter	1/50~1/12000 seconds
Focus length	3.9~39.0mm
Optical focus	10X
Focus	Auto/manual, take high-performance DSP to realize complete digit and ultra-high speed focus function
Presets	256
Patrol track	4 groups, each can record 100 actions
Cruise track	Total 30 presets can join cruise, can setting the presets' residence time
Other scan	Support Horizontal scan, deuce area scan, scan random
Rotation range	Horizontal 360°unlimted rotation, Vertical 180°,auto reversal
Rotation speed	Horizontal & Vertical Min 0.01°,Max 300°/S
Communications	RS-485, PELCO D, PELCO P
OSD	Yes
Temperature control	Built-in
IR Distance	50m
Power supply	DC12V/3A
Material	Aluminum shell, waterproof IP66
Work environment	-20°C ~ +50°C(select temperature control accessories), <95%RH

10X High Speed Dome Camera